



BLIND RIVET STRUCTURAL REMACHE ESTRUCTURAL

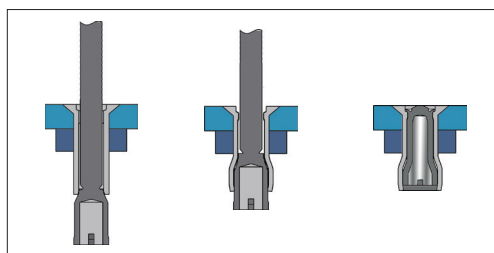

English	Español	Français	Deutsch	Portugues
Countersunk head 100°	Cabeza avellanada 100°	Tête fraisee 100°	Senkkopf 100°	Cabeça embeber 100°
Body: Steel * zincplated A2K	Cuerpo: Acero * cincado A2K	Corps: Acier * zingué A2K	Hülse: Stahl * verzinkt A2K	Corpo: Aço * zincado A2K
Mandrel: Steel ** zincplated A2K	Vástago: Acero ** cincado A2K	Clou: Acier ** zingué A2K	Dorn: Stahl ** verzinkt A2K	Prego: Aço ** zincado A2K
* Steel /acero C35 DIN				
** Steel /acero 35B2 DIN 1.5511				

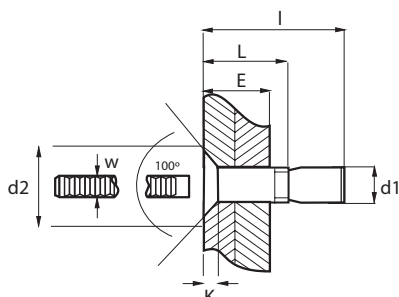

Test according to / Ensayos realizados según EN ISO 14589

d1 Ø m/m	L Nominal m/m	E MAX. m/m		d2 Ø m/m	K m/m	W m/m	I m/m	(N)	(N)	Part No/Ref.
4,8	12,3	3,20 - 8,40	4,90 - 5,10	8,70	1,80	3,00	20,00	5100	3900	G1822004812
	16,5	3,20 - 12,20					26,30			G1822004816
6,5	16,5	3,00 - 12,00	6,60 - 7,00	10,10	2,00	4,00	26,50	11200	8800	G1822006516
	20,0	3,00 - 16,00					33,00			G1822006520
	22,5	6,00 - 18,00					35,50			G1822006522

Note: This product needs to be set with a special nosepiece. For installation information please contact your local BRALO representative.